

DATA SHEET

19" 1RU Power Supply Frame For Optical Modules **BR-400**

Contents

- Description
- Specifications
- Applications
- Technical Specification
- Absolute Maximum Ratings
- Operating Conditions
- Drawing

Optolinks

HQ Address
46 Corporate Park #130 Irvine, CA 92606
949-701-4742
info@VigilLink.com

■ Description

19" 1RU Power Supply Frame, BR-400 is an ideal solution for Opticis optical module products and the systematic fiber-optic needs to adopt up to 8 units of DVI/HDMI/DisplayPort optical extenders from Opticis securely in place. Each module slot is connected into a central power bus. BR-400 uses 100-240VAC, 50-60Hz of input power for dual powers with load-sharing and redundant backup. Its LEDs are located in the front panel to indicate status and failure of each power supplies. The rack ears of BR-400 are installed on both front and rear up to users' preference.

* The optical modules and power supply are separately sold.

* HDFX/DPFX-700 optical modules are required the separate screws for installation.

■ Specifications

- Compact 19" 1RU Power Supply Frame
- Adopts up to 8 units of Opticis optical modules
- Available for primary and dual power models for redundancy
- Supports Load-sharing
- Input power: 100-240VAC, 50-60Hz

■ Applications

- Control room
- Medical imaging
- Conference room

■ Technical Specifications

	Parameter	Specifications
Electrical	Input power	12.0V / 4.2A (Locking type) 13.5V / 6.5A (Phoenix type)
	Output power	5.0V / 1.0A
Mechanical	Dimension(W x D x H)	482 x 210 x 44 mm

■ Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these of any other conditions in excess of those given in the operational sections of the datasheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

Parameter	Symbol	Min	Max	Unit
Storage Temperature	T _{STG}	-30	70	°C
Supply Voltage	V _{CC}		18	V
Operating Relative Humidity	RH _{OP}	10	85 ¹⁾	%RH
Storage Relative Humidity	RH _{STG}	10	95 ²⁾	%RH


*1), 2) Under the conditions of No drops of dew

■ Operating Conditions

Parameter	Symbol	Minimum	Typical	Maximum	Units
Operating Temperature	T _{OP}	0		50	°C
Power Supply Rejection (Note1)	PSR		50		mV _{p-p}
Supply Voltage	V _{CC}	8	12	16	V
Supply Current	I _{CC}			2	A
Power Dissipation	P _{TX}			24	W

* Tested with a 50 mV_{p-p} sinusoidal signal in the frequency range from 500Hz to 500MHz on the V_{CC} supply with the recommended power supply filter in place. Typically less than a 0.25dB change in sensitivity is experienced.

■ Dimensions

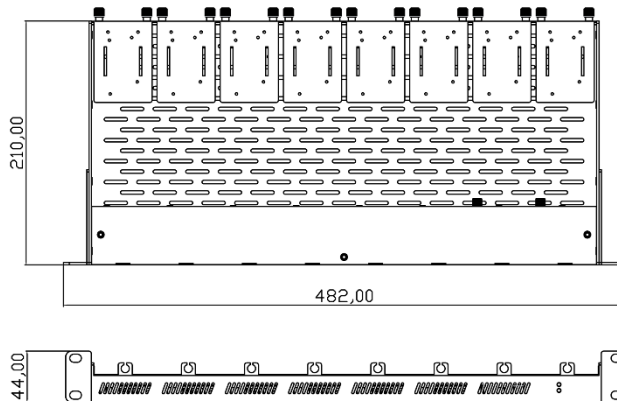

Dimensions (L*W*H): 482 X 210 X 44 mm

■ Connection Diagram

